
## *Surecool 2*1




- Cooling capacity 2000W
- 230 volt supply motor and pump
- With fan and radiator
- Size 240Wx240Lx700H mm \*
- Weight 15 kg (empty)
- Ideal for MIG, TIG & PLASMA torches and small SPOT WELDERS

Suitable for MIG/TIG and PLASMA TORCHES and for SPOT WELDERS



- Cooling capacity 5800 watts
- 230 or 400 volt single phase vlqque
- Twin 5 litre tank with sight gauge
- Twin cooling fans and radiators
- 1/4 BSP inlet/outlet
- Size (mm) 520Lx185Wx665H
- ❖ Weight 22 kg (empty)
- Ideal for heavy duty MIG and TIG applications and especially for SPOT WELDERS up to 80KVA

- Cooling capacity 9000watts
- ❖ Flow rate 5 27 litre/min
- 230 or 400volt single phase supply
- ❖ 30 litre tank with sight gauge
- Twin 250mm diameter cooling fans
- Twin radiators with 8.4 sgm area.
- ❖ ½" BSP inlet/outlet
- ❖ Size 310Wx620Lx723H(+36mm fan
- Weight 38 kg (empty)
- Ideal for Projection and Seam welders

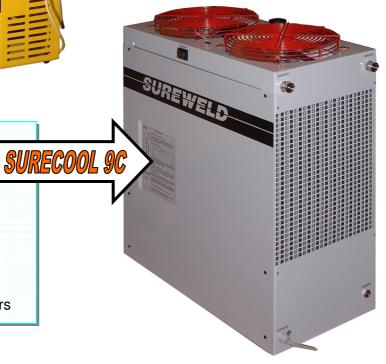



**SUREWELD (UK) LIMITED** SANDERS LODGE INDUSTRIAL ESTATE RUSHDEN, NORTHANTS, NN10 6BQ

tel: 01933 357005 fax: 01933 357606 email: info@sureweld.co.uk web: www.sureweld.co.uk