
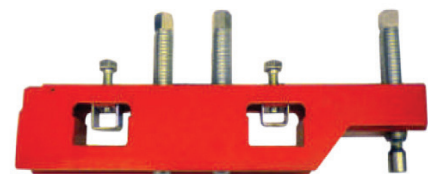


# Double Chain Clamps

## Ultra heavy duty double chain reforming alignment clamp

### Features and advantages:

- **Precision Alignment** – The double jackbars, spaced around the outside diameter of the pipe, provide accurate alignment and reforming of the internal or external diameters of both pipes within 0.5mm.
- **Extremely Tough** – Reforms pipes on both sides of the weld joint to Sch80, and elbows, tees and other fittings.
- **Adaptable** – The Chain Clamp can be used to support, align, and reform elbow, tees and other fittings that a cage clamp cannot cope with. One Chain Clamp covers the range of eight (8) cage clamps.
- **Extra Heavy Duty Independent Jackbars** – Enable the operator to form the pipe to the required shape. Each Jackscrew has independently pivoting feet to cope with uneven surfaces.
- **Versatile** – Elbows, tees and other fittings can be aligned with the Fitting Alignment Device.

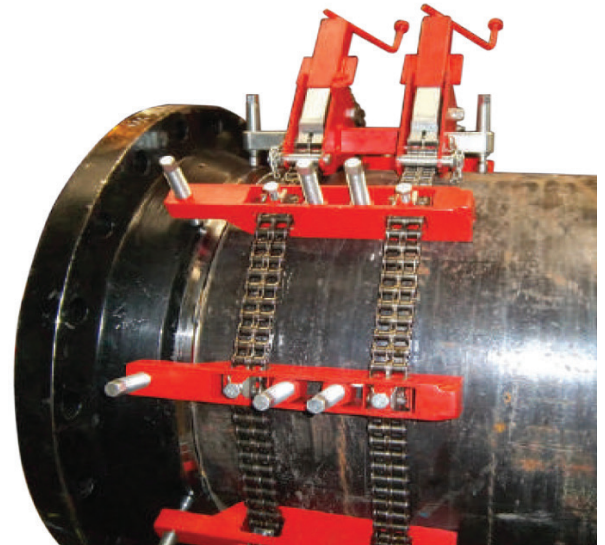

### Double Chain Clamp includes:

- Length of chain required for the pipe range
- Extra heavy-duty jackbars listed for the pipe range
- Number of Main blocks listed for the pipe range
- Two (2) fine adjustments
- Fitting alignment device (larger clamps supplied with come-a-long)

- Jackscrew wrench
- Operating instructions
- Hi-Lo gauge

### Optional:

- Torque wrench
- Carbon or stainless steel spacing screws (optional)
- Additional jackbar

Part No.	Pipe Diameter Range "/>mm	No. Of Jackbars	Number of Main Blocks	Shipping WT KGS
DCC36	10-36 / 254-914	9	1	100 / 220
DCC36SS	10-36 / 254-914	9	1	100 / 220
DCC48	10-48 / 254-1219	12	1	126 / 278
DCC48SS	10-48 / 254-1219	12	1	126 / 278
DCC54	10-54 / 254-1372	14	1	136 / 300
DCC54SS	10-54 / 254-1372	14	1	136 / 300
DCC60	10-60 / 254-1524	16	1	149 / 328
DCC60SS	10-60 / 254-1524	16	1	149 / 328
DCC72	10-72 / 254-1829	20	1	176 / 387
DCC72SS	10-72 / 254-1829	20	1	176 / 387

Double chain clamps must not be used as a lifting device. When using the Fitting Alignment Device fittings must be independently supported.