


# Single Chain Clamps

## Double Jackscrew clamps for aligning & reforming pipes

### All clamps include:

- Length of chain required for the pipe range
- Double jackscrew jackbars listed for the pipe range
- Main block
- Fine adjustment
- Fitting alignment device
- Jackscrew wrench
- Parts and operating manual
- Metal Storage box
- Hi-Lo gauge

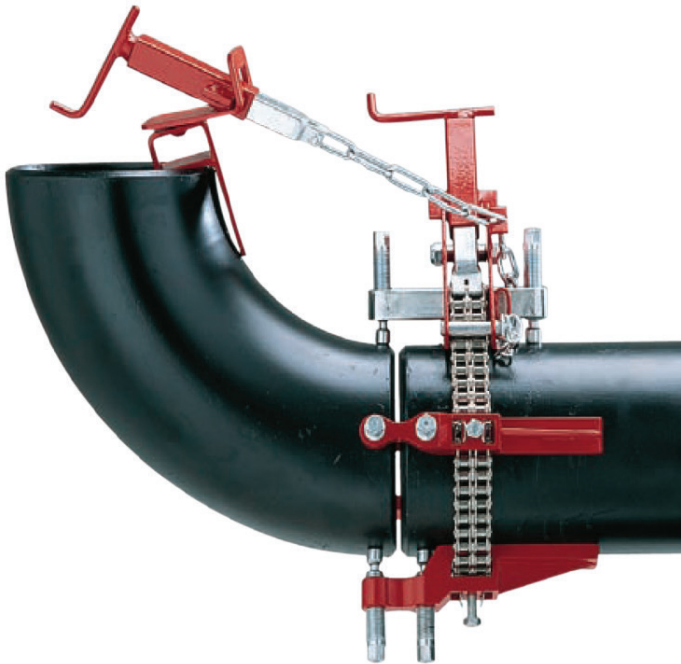

### Features and advantages:

- Alignment - can align all pipe schedules accurately.
- Reforming - jackscrews enable the elimination of 'Hi-Lo' points either side of the weld joint. Can reform up to schedule 40 pipes.
- Adaptable - one chain clamp covers the range of 8 cage clamps.
- No Tack Jackbars - joints can be fully welded without removing the clamp.
- Versatile - elbows, tees and other fittings can be accurately aligned using the Fitting Alignment Device.
- Quality - jackbars are cast from high quality steel alloys.
- Additional jackbars can be added if extra pressure is required.
- Jackscrews - Jackbars have two jackscrews with independently pivoting pads to compensate for uneven surfaces.
- Stainless Steel - available in both carbon and stainless steel versions.

Part No.	Pipe Diameter Range "/>mm	No. Of Jackbars	Reforms Pipe to Schedule	Aligns Pipe to Schedule	Shipping WT KGS
SCC12	1-12 / 25.4 - 304.8	4	40	80	12
SCC12SS	1-12 / 25.4 - 304.8	4	40	80	12
SCC20	4-20 / 101.6 - 508	7	40	80	17
SCC20SS	4-20 / 101.6 - 508	7	40	80	17
SCC36	10-36 / 254 - 914.4	8	40	80	42
SCC36SS	10-36 / 254 - 914.4	8	40	80	42
SCC54	10-54 / 254 - 1371.6	13	40	80	82
SCC54SS	10-54 / 254 - 1371.6	13	40	80	82

GBC Chain Clamps must not be used as a lifting device.  
Fittings must be independently supported at all times.