



PRODUCT INFORMATION


SIFSILCOPPER No 968

EN 14640    Cu 6560 (CuSi3Mn1),  
BS: 2901    C9

DESCRIPTION

A copper rod, containing 3% silicon and 1% manganese used for fusion welding materials of similar composition, copper alloys (brass) and for TIG brazing steels. It is also suitable for surfacing steel and dissimilar metal applications. Excellent performance on galvanized steel and provides good corrosion-resistance.

WELDING POSITIONS

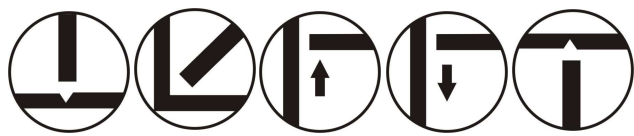

Suitable for use in the ship building/offshore industries as well as the heating and ventilation industries for corrosion resistance, and tubular product fabrication. Can also be used for sculpture repair.

TYPICAL WELD METAL COMPOSITION

Mn	1 %
Si	3 %
Cu	Bal

TYPICAL MECHANICAL PROPERTIES

Melting Point	980-120 °C
Ult Tensile Strength	350 N/mm²
Hardness	90

MATERIAL TO BE WELDED

Oxy-acetylene gas flame should be slightly oxidizing. Keep the weld puddle small in order to promote fast solidification and minimize cracking. In oxy-acetylene welding, SIF Sil copper flux should be used both before and during welding. Preheat is not recommended. Can be used in oxy-acetylene for fusion welding of copper alloys and brass. Also popularly used in TIG for brazing steel and cast iron to copper, brass and bronze.

AVAILABLE FORMATS

1M ROD (TIG / GTAW)			
Dia	1kg Pkt	2.5kg Ctn	5.0kg Ctn
1.2mm	RO961201	RO961225	RO961250
1.6mm	RO961601	RO961625	RO961650
2.4mm	RO962401	RO962425	RO962450
3.2mm	RO963201	RO963225	RO963250

Oxy-acetylene
TIG current DC: = +
Amps: 70-320
Gas: Pure Argon 15-20lpm

For further information, contact Weldability | Sif technical support on 0870 330 7757 or email [service@wholeweld.co.uk](mailto:service@wholeweld.co.uk)



Registered in England No. 1684362  
Registered Office: as above

Doc Ref: SIF/PI/RO961201