As a manufacturer and distributor of ceramics, Gullco can provide you with a KATBAK® ceramic weld backing to meet your needs. To maximize the benefits of your KATBAK® ceramic use in combination with the KAT® weld automation carriage.



KATBAK® CERAMIC FEATURES AND BENEFITS:

- A microprocessor controlled gas furnace ensures even temperature control during baking of the ceramics insuring none of the ceramics are under or, over baked

- A fume test has been done on the adhesive tape. A copy is on Share File. This test is very important for health and safety.


- Gullco does NOT use any dangerous components in our ceramics that could cause health issues.
- Gas holes allow tape to stay in contact with plate holding ceramic tight to the plate being welded.
- Gullco uses a 4" wide tape which provides superior adhesion to competitive tapes
- A raise centering aid helps placement and alignment of the ceramic over the joint.
- Ceramics come with radiused segments to allow better contact with the material

- Gullco provides ceramic in 30 foot boxes or slightly more to allow for less waste and are packaged in vacuum sealed bags for longer shelf life. 13) Gullco ceramics are high density ceramics, baked at high temperature to offer the best heat absorption for ensuring excellent quality welds.


GULLCO

KAT, KBM, MOGGY, KATBAK & SAM are registered trademarks of Gullco Enterprises Limited

Distributed by:

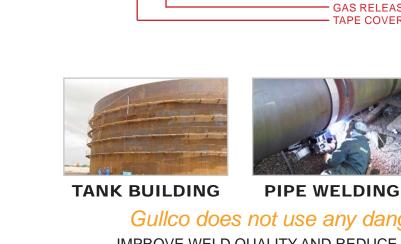



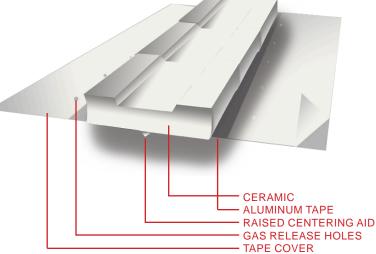



AUSTRALIA - GULLCO INTERNATIONAL PTY LIMITED ne: 61 (0)7 3348 5515 Fax: 61 (0)7 3348 5510 INDIA - GULLCO INTERNATIONAL INDIA PVT LIMITED Phone: +91-20-2551-1433 Fax: +91-20-2551-1433 e-mail: indsales@gullco.cor CHINA - GULLCO INTERNATIONAL SHANGHAI LIMITED Phone: +8621-50460341 Fax: +8621-50463554 SINGAPORE - GULLCO INTERNATIONAL LIMITED hone: +65-9385-4468 LATIN AMERICA - GULLCO INTERNATIONAL LIMITED hone: 55-11-99485-1336 e-mail: rogerio.mace GERMANY - ms gmbh Melchior Schweißtechnik Fax: +49(0)208 999 38-38 e-mail: christian.mertens@ms-gmbh.co Phone: +49(0)173 5437722

Phone: 1-905-953-4140

Phone: 1-440-439-8333

e-mail: ussales@gullco.com

e-mail: uksales@gullco.com

e-mail: ausales@gullco.co

e-mail: c.zhang@gullco.con

e-mail: benny.lim@gullco.co

aulico cor

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL DIMENSIONS ARE NOMINAL

Fax: 1-905-953-4138

EUROPE - GULLCO INTERNATIONAL (U.K.) LIMITED

Fax:1-234 808-4146

CANADA - GULLCO INTERNATIONAL LIMITED

U.S.A - GULLCO INTERNATIONAL INC.

Phone: +44 1257-253579 Fax: +44 1257-254629





CERAMIC WELD BACKING TAPE - KATBAK®

Impart x-ray quality back beads on the root pass.

Weld one side only

Deposit more weld metal

Eliminate defects and rework

Eliminate costly unnecessary gouging and grinding

Industry first, raised centering aid makes aligning and applying the ceramic quicker and more accurate

Size 1/4" (6.3 mm) to 2" (51 mm) special sizes and confrigurations available

Conveniently packaged and sealed in plastic for moisture proof protection

Industry leading 4" heat receptive pressure sensitive foil for improved adhesion to work piece









INFRASTRUCTURE


Gullco does not use any dangerous components in our ceramics IMPROVE WELD QUALITY AND REDUCE COST WITH KATBAK® CERAMIC WELD BACKING




KATBAK® Ceramic Weld Backing Improves Weld Quality, Saves Time and Reduces Cost

A D D IG6-RD IG9-RD IG13-RD IG15-RD IG20-RD

	1G6-RD	1/4	6mm	
	1G9-RD	3/8	9 mm	
A	1G13-RD	1/2	13mm	
	1G15-RD	5/8	15mm	
	1G-20RD	7/8	20mm	
В		1"	25.4 mm	
С		3" Tape	76.2 mm	
D		24"	609.6 mm	



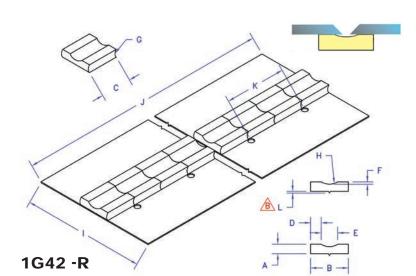


A	1/4"	6.35 mm
В	1"	25.4 mm
С	1" Min.	25.4 mm
D	9/32"	7.14 mm
E	7/16"	11.11 mm
F	1/16"	1.58 mm
G	3/16" Radius	4.76 mm
Н	13/32" Radius	10.31mm
I	4" Tape	101.60 mm
J	24" Overall	609.60 mm
K	2"	50.80 mm
L	3/64"	1.2 mm


IG93-R

Α	5/16" MIN.	[7.93mm]
В	7/8" Min 1" Max.	(22-25mm)
С	1"	(25.4mm)
D	5/32" (Ref.)	(3.96mm)
E	1/16"	(1.58mm)
F	45 °	45 °
G	7/16"	(11.11mm)
Н	4" MIN.	(101.6mm)
I	24" Overall	(609.6mm)
J	3/16" Radius	(4.76mm)
к	2"	(50.80 mm)
L	3/64"	(1.2 mm)


KATBAK® Ceramic Weld Backing Can Lay Root Weld & Fill In One Pass With X-Ray Quality Back Beads

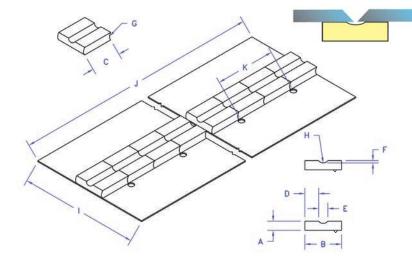

1G43-R

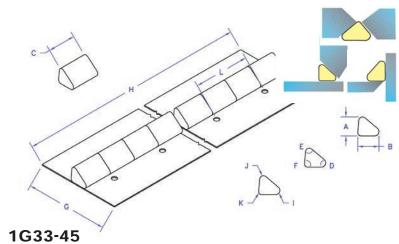

1G33-60 1G33-90

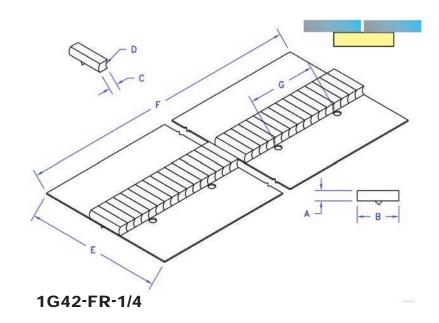

* Available in 1/4" to 2" (6.3 mm to 50.8 mm) tiles

A	1/4"	6.35 mm
В	1"	25.4 mm
С	1" Min.	25.4 mm
D	3/8"	9.52 mm
E	1/4"	6.35 mm
F	1/16"	1.58 mm
G	3/16" Radius	4.76 mm
Н	5/32" Radius	3.96 mm
I	4" Tape	101.60 mm
J	24" Overall	609.60 mm
K	2"	50.80 mm
L	3/64"	1.2 mm

Α	1/4"	6.35 mm
В	1"	25.4 mm
С	1" Min.	25.4 mm
D	3/8"	9.52 mm
E	1/4"	6.35 mm
F	1/16"	1.58 mm
G	3/16" Radius	4.76 mm
Н	5/32" Radius	3.96 mm
I	4" Tape	101.60 mm
J	24" Overall	609.60 mm
K	2"	50.80 mm
L	3/64"	1.2 mm

А	1/4"	6.35 mm
В	1"	25.4 mm
С	1/4" Min.	6.35 mm
D	3/16" Radius	4.76 mm
Е	4" Tape	101.6 mm
F	24" Overall	609.6 mm
G	2"	50.8 mm