DataSheet No. GPT42GEN - Issue 1



# **Tech Master GPT420 Series**

4.5 Purity Two Stage Brass Barstock Piston Cylinder Regulator



The Tech Master GPT420 Series two stage piston cylinder regulators are designed for primary pressure gas control of non-corrosive or toxic, technical gases up to grade 4.5 purity (99.995%), on applications where constant delivery pressure is required as the cylinder pressure decreases.

- GPT421 Series | Two Stage Piston Cylinder Regulator, FKM Seal
- **GPT422** Series | Two Stage Piston Cylinder Regulator, EPDM Seal



#### **FEATURES**

- Five port configuration
- Front panel mounting capabilities
- Encapsulated seat design
- Low wetted surface area
- Full range of inlet and outlet fittings
- Base and side entry



BodyBrass BarstockBonnetBrass Barstock

■ Piston Brass

Seal FKM / EPDMValve Seat Polyamide (Nylon®)

■ Filter 10 Micron 316L Stainless Steel

#### **SPECIFICATION**

Maximum Inlet Pressure 60 bar (870 PSI)

300 bar (4350 PSI)\*

■ Delivery Pressure Range 20 bar (300 PSI)

50 bar (725 PSI)

Gauges 50mm (2") DiameterPorts 1/4" NPT Female


■ **Temperature Range** -20° C to +60° C (-4° F to +140° F)


■ Flow Coefficient (Cv) 0.079

■ Weight 2.1 kg (4.7 lbs)\*\*


\* Subject to cylinder connection - \*\* Cyliner connection not included

### FLOW PERFORMANCE






200 bar Inlet Pressure @ 21 °C



### (1) DRAWINGS

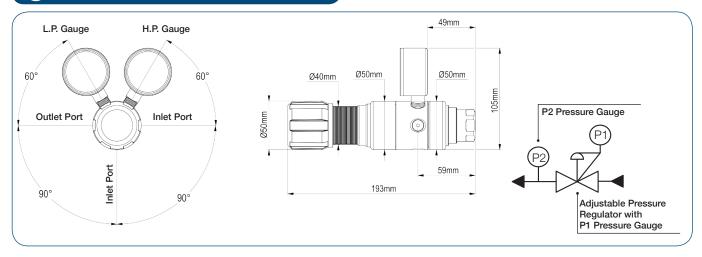

## MODEL NO. SELECTOR GUIDE

#### Example for a Model No. for GPT420 Series

GPS421-	21- 02-		07-		00-		00-		001-		01-		A	
Product Type	Inle Press Bar [F	ure	Р	Outlet ressure ar [PSI]	Inle	et Pressure Gauge	ı	Outlet Pressure Gauge		Inlet Connection		Outlet Connection		Options
GPT421	<b>02</b> 60 [87		07	0 to 20 [300]	00	No Gauge Fitted	00	No Gauge Fitted	000	1/4 NPT Female	00	1/4 NPT Female	Α	No Options Selected
GPT422	<b>04</b> 300 [43	) bar 50]	10	0 to 50 [725]	01	bar/PSI	01	bar/PSI	001	1/8 Stainless Steel Compression	01	1/8 Stainless Steel Compression	K	Certificate of Conformity (CoC)
					10	Plugged Port	10	Plugged Port	002	1/4 Stainless Steel Compression	02	1/4 Stainless Steel Compression	L	Panel Mount Locking Nut Kit
									003	6mm Stainless Steel Compression	03	6mm Stainless Steel Compression	Р	Calibration / Pressure Test Certificate
									004	1/4 NPT Male	04	1/4 NPT Male	х	Special Instruction
									007	G3/8 BSP R/H Brass Male	05	1/4 SAE Flare Brass Male		
									008	G3/8 BSP L/H Brass Male	06	G1/2 BSP R/H Brass Male		
									009	BS341 No.3 (Base Entry)	07	G3/8 BSP R/H Brass Male		
									010	BS341 No.3	08	G3/8 BSP L/H Brass Male		
									011	BS341 No.4 (Base Entry)	09	Isolation Valve, 1/4 NPT Female, FKM Seal		
									012	BS341 No.4	10	Isolation Valve, 1/4 NPT Female, EPDM Seal		
									015	BS341 No.8	11	Isolation Valve, 1/8 Stainless Steel Compression, FKM Seal		
									030	DIN477 No.6	12	Isolation Valve, 1/8 Stainless Steel Compression, EPDM Seal		
									033	DIN477 No.9	13	Isolation Valve, 1/4 Stainless Steel Compression, FKM Seal		
									034	DIN477 No.10	14	Isolation Valve, 1/4 Stainless Steel Compression, EPDM Seal		
									045	CGA320	15	Isolation Valve, 6mm Stainless Steel Compression, FKM Seal		
									052	CGA540	16	Isolation Valve, 6mm Stainless Steel Compression, EPDM Seal		
									053	CGA580	17	Isolation Valve, 1/4 NPT Male, FKM Seal		
									conn Tech	our complete range of cylinder rections refer to "ICONTGEN- Master Cylinder Connections sheet"	18	Isolation Valve, 1/4 NPT Male, EPDM Seal		
											19	Isolation Valve, G3/8 BSP R/H Brass Male, FKM Seal		
											20	Isolation Valve, G3/8 BSP R/H Brass Male, EPDM Seal		
											For our complete range of cylinder connections refer to 'Cylinder Connections Data'			