

# CleanAirTower SF 9000

Art. No.: 390 450



## Technical Data

Filter	
Filter stages	2
Filter method	Storage Filter
Filter surface	100 m <sup>2</sup>
Filter material	nano-cellulose
Filter efficiency	> 99.9 %
Dust classification	M
Basic data	
Extraction capacity	9000 m <sup>3</sup> /h
Height	3050 mm
Diameter	1172 mm
Weight	446 kg
Motor power	5.7 kW
Power supply	3 x 400 V / 50 Hz
Rated current	9 A
Control voltage	24 V, DC
Noise level	70 dB(A)
Additional information	
Fan type	Centrifugal fan with EC motor

\* Cloud function: Cloud use free of charge of 12 months

## Applications

- Low to medium levels of smoke and dust
- Workshops where local exhaust ventilation is not possible
- To complement local exhaust ventilation systems
- Environments with changing sources of smoke and dust
- Workstations, Workshops, Logistic and distribution centres

## Benefits


- Fleet management, remote maintenance and pre-noise maintenance using autarkic networking via mobile radio to the KEMPER cloud\*
- Minimization of heating costs due to air recirculation and air distribution
- Low risk potential due to foreign bodies
- Cost-effective installation or retrofit, as no ductwork is needed
- Short-term increase in extraction performance due to TurboBoost function

## Properties

- 360 degree extraction radius
- KEMPER-Cloud connection via mobile network\*
- Slow, low-impulse air circulation
- Displacement flow principle, recommended by health and safety bodies
- Control via touch panel
- System barely generates air turbulence
- TurboBoost Function

## Accessories

- AirWatch

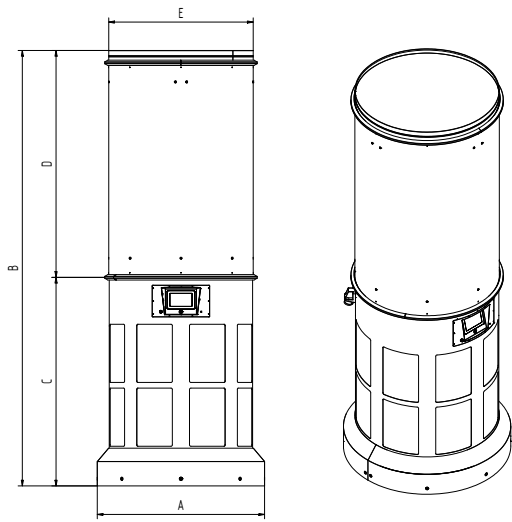

## Technical Data

Dimensions	
A	1172 mm
B	3050 mm
C	1461 mm
D	1589 mm
E	1012 mm