DataSheet No. GPP40GEN - Issue 1



4.5 Purity Single Stage Brass Barstock Diaphragm **Outlet Point Regulator**



The Tech Master GPP400 Series single stage diaphragm outlet point regulators are designed for secondary pressure gas control of non-corrosive or toxic, technical grade gases up to grade 4.5 purity (99.995%), on gas distribution systems.

■ GPP400 Series | Single Stage Diaphragm Outlet Point Regulator



FEATURES

- Three port configuration
- Rear point mounting (1/4 NPT male)
- Encapsulated seat design
- Low wetted surface area
- Full range of outlet fittings
- Rear entry



Body Brass Barstock High Strength Alloy Bonnet

Diaphragm Polychloroprene (Neoprene®) (CR)

Polyamide (Nylon®) Valve Seat

■ Filter 10 Micron 316L Stainless Steel

SPECIFICATION

60 bar (870 PSI) ■ Maximum Inlet Pressure

■ Delivery Pressure Range 1.5 bar (22 PSI)


3.5 bar (50 PSI) 6 bar (90 PSI) 10 bar (150 PSI)

50mm (2") Diameter Gauges ■ Ports 1/4" NPT Female


-20° C to +60° C (-4° F to +140° F) Temperature Range

Weight 1.1 kg (2.5 lbs)

FLOW PERFORMANCE

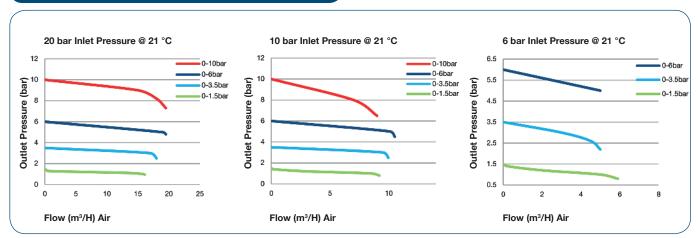

(1) DRAWINGS

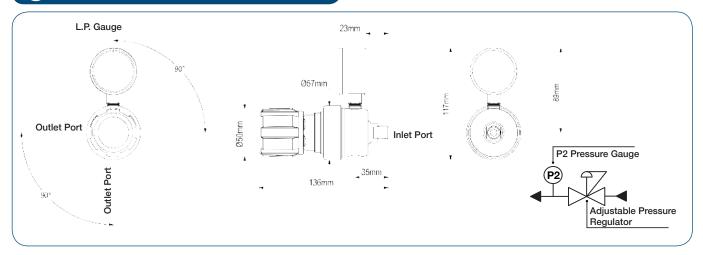

MODEL NO. SELECTOR GUIDE

Example for a Model No. for GPP400 Series

GPP400-	02-	Outlet Pressure Bar [PSI]		00- Inlet Pressure Gauge		Outlet Pressure Gauge		004-		01-		Α	
Product Type	Inlet Pressure Bar [PSI]							Inlet Connection		Outlet Connection	Options		
GPP400	02 60 bar [870]	02	0 to 1.5 [22]	00	No Gauge Fitted	00	No Gauge Fitted	004 1/4 NPT Male	00	1/4 NPT Female	Α	No Options Selected	
		03	0 to 3.5 [50]			01	bar/PSI		01	1/8 Stainless Steel Compression	K	Certificate of Conformity (CoC)	
		04	0 to 6 [90]			10	Plugged Port		02	1/4 Stainless Steel Compression	Р	Calibration / Pressure Test Certificate	
		05	0 to 10 [150]						03	6mm Stainless Steel Compression	х	Special Instruction	
									04	1/4 NPT Male			
									05	1/4 SAE Flare Brass Male			
									06	G1/2 BSP R/H Brass Male			
									07	G3/8 BSP R/H Brass Male			
									08	G3/8 BSP L/H Brass Male			