

4.5 Purity Single Stage Brass Barstock Diaphragm **Outlet Point Regulator**



The Tech Master GPP400 Series single stage diaphragm outlet point regulators are designed for secondary pressure gas control of non-corrosive or toxic, technical grade gases up to grade 4.5 purity (99.995%), on gas distribution systems.

■ GPP400 Series | Single Stage Diaphragm Outlet Point Regulator



- Three port configuration
- Rear point mounting (1/4 NPT male)
- Encapsulated seat design
- Low wetted surface area
- Full range of outlet fittings
- Rear entry

Gauges

Ports

MATERIAL

Brass Barstock Body Bonnet High Strength Alloy

Diaphragm Polychloroprene (Neoprene®) (CR)

Valve Seat Polyamide (Nylon®)

■ Filter 10 Micron 316L Stainless Steel

SPECIFICATION


60 bar (870 PSI) Maximum Inlet Pressure Delivery Pressure Range 1.5 bar (22 PSI)

> 3.5 bar (50 PSI) 6 bar (90 PSI) 10 bar (150 PSI) 50mm (2") Diameter 1/4" NPT Female


■ Temperature Range -20° C to $+60^{\circ}$ C (-4° F to $+140^{\circ}$ F)

Weight 1.1 kg (2.5 lbs)

FLOW PERFORMANCE

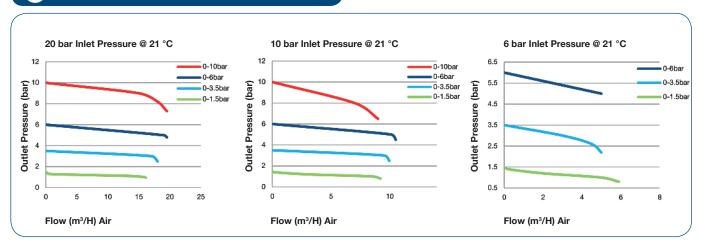

(1) DRAWINGS

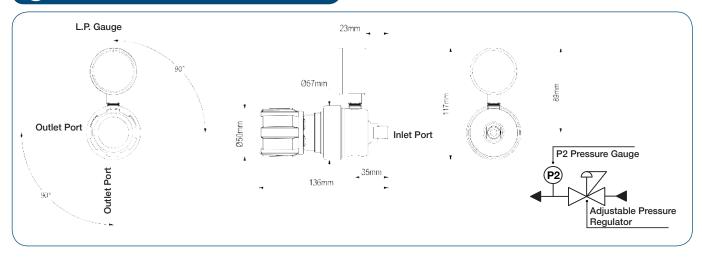

12 MODEL NO. SELECTOR GUIDE

Example for a Model No. for GPP400 Series

GPP400-	02-		02-		00-		00-	004-		01-		A	
Product Type	Inlet Pressure Bar [PSI]	Outlet Pressure Bar [PSI]		Inlet Pressure Gauge		Outlet Pressure Gauge		Inlet Connection		Outlet Connection		Options	
GPP400	02 60 bar [870]	02	0 to 1.5 [22]	00	No Gauge Fitted	00	No Gauge Fitted	004 1/4 NPT Male	00	1/4 NPT Female	Α	No Options Selected	
		03	0 to 3.5 [50]			01	bar/PSI		01	1/8 Stainless Steel Compression	K	Certificate of Conformity (CoC)	
		04	0 to 6 [90]			10	Plugged Port		02	1/4 Stainless Steel Compression	Р	Calibration / Pressure Test Certificate	
		05	0 to 10 [150]						03	6mm Stainless Steel Compression	х	Special Instruction	
									04	1/4 NPT Male			
									05	1/4 SAE Flare Brass Male			
									06	G1/2 BSP R/H Brass Male			
									07	G3/8 BSP R/H Brass Male			
									08	G3/8 BSP L/H Brass Male			