


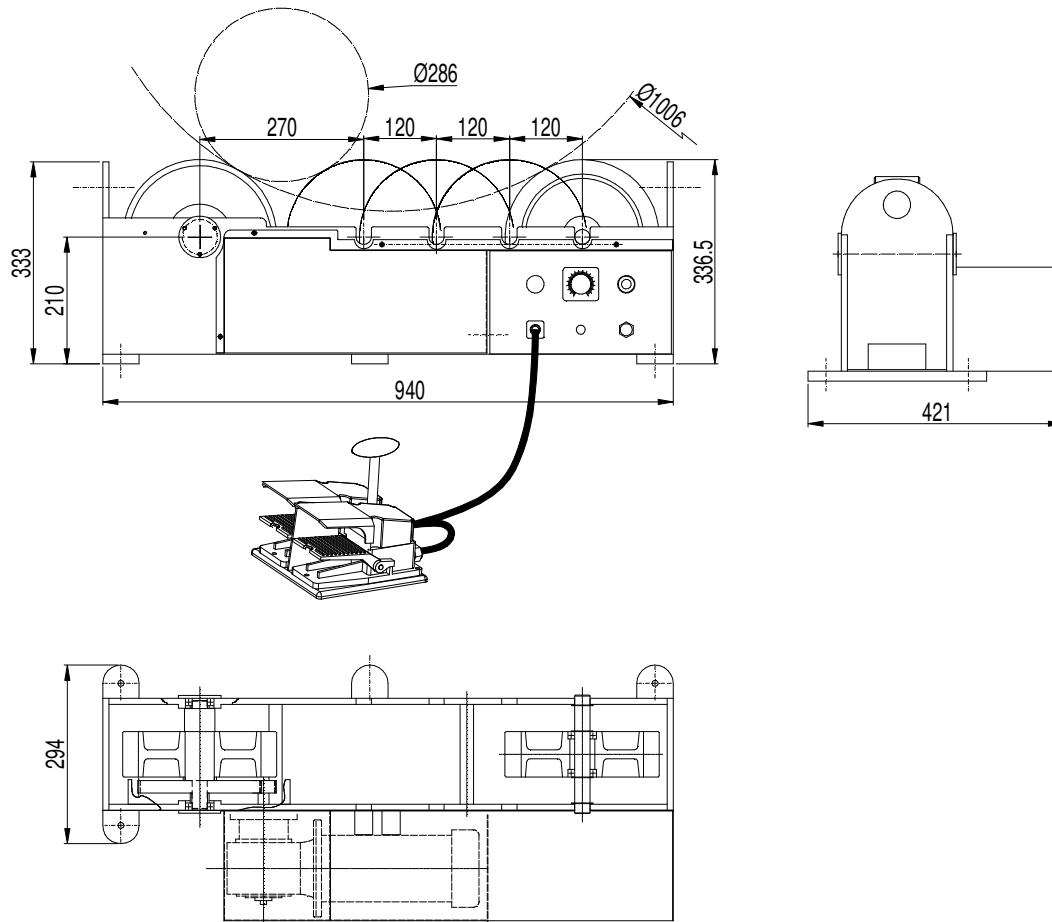

Specification for Rotator-Power Unit

1	Model	RW3-4.5-SV-6.3-FM-WD-WH
2	Capacity(loading)	1.5 Metric Ton
3	Capacity(Turning)	4.5 Metric Ton
4	Vessel Size (Min)	Ø286 at 60° included Angle
5	Vessel Size (Max)	Ø1006 at 60° included Angle
6	Tyre Type and Size	Vulcanized PU, Ø254mm×75mm
7	Electrical Panel	Yes
8	Roller Speed	400 to 4000mm /min
9	Incoming Supply	230V-1P-50Hz
10	Control Voltage	24V AC
11	Roller Drive Control	DC Motor
12	Control Means	Via Foot Switch c/w 5m Cable
13	Roller Drive Motor	DC 500W
14	Travelcar(Bogie)	N.A.
15	Travelcar Speed	N.A.
16	Surface Preparation	Gritblast to SA2.5
17	Painting	2 coats Zinc Phosphate, 1 coat Polyurethane
18	Color	RAL 3003 Red
19	Qty	10 units
20	Est Weight	104 KG

Note:

1. Drawing is accurate at time of printing but may subject to changes at final design.
2. All dimensions in mm unless otherwise specified.

REV	DATE	BY	DESCRIPTION	REMARKS
FILENAME:				REVISION:
Q22-1201-GA01				0
APPROVAL:				BY: SC 10/02/2023
CLIENT:				SCALE: N.T.S.
TITLE: Rotator 3MT, Power				
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DIVULGED, IN WHOLE OR IN PART, WITHOUT AUTHORIZATION IN WRITING FROM RED ROCK AUTOMATION.				